

Low-Noise Half Metal Type Tubular Ventilating Fan 超静音半金属型管道式换气扇



BPT10-13H20, BPT10-23H25
BPT10-23H30, BPT10-23H35
BPT15-33H45, BPT15-33H55



BPT10-13H20-A, BPT10-23H25-A
BPT10-23H30-A, BPT10-23H35-A
BPT15-33H45-A, BPT15-33H55-A



BPT10-13H20-T, BPT10-23H25-T
BPT10-23H30-T, BPT10-23H35-T
BPT15-33H45-T, BPT15-33H55-T

静革命 Low Noise

大幅降低噪音，静音运行
Noise level dramatically reduced

It is guaranteed by a new motor developed by Neoflon with high-quality ball bearing. That the upgraded blower perfectly matching the air flow improves the air-tightness. The resonant coefficient of the metal cabinet is low, which is safe, quiet and durable.

通过新型电机+绿岛NF电机搭配优质漆珠轴承噪音更小
改进后噪音与风速完美融合减少风声
金属箱体共振系数小安全安静又耐用

低碳革命 Low Carbon

低功耗，长寿命电机
Low energy consumption with a long service life motor.

Motor of low-noise half metal type ventilating fan VS Neoflon NF motor
Neoflon NF电机 VS 传统换气扇电机
直径: 65.5mm
高度: 55.3mm
Height: 65.5mm

采用自主研发绿岛NF电机耗电少
传统电机耗电大，耗电多





产品革命 Smaller Unit Volume

电机体积缩小61%
Unit volume is 61% smaller than average

Neoflon NF电机 VS 传统换气扇电机
直径: 60mm
高度: 65.5mm
Height: 65.5mm



External Dimension 外形尺寸图



BPT10-13H20, BPT10-23H25, BPT10-23H30
BPT10-23H35, BPT15-33H45, BPT15-33H55



BPT10-13H20-T, BPT10-23H25-T, BPT10-23H30-T
BPT10-23H35-T, BPT15-33H45-T, BPT15-33H55-T

Dimension Table 尺寸表

型号 Model No.	A	B	C	D	E	F	G	H	I	Units 单位:mm
BPT10-13H20 BPT10-13H20-T	110	234	220	260	205	174	88	18.5		
BPT10-23H25 BPT10-23H25-T	160	259	245	287	230	174	88	19.5	96	
BPT10-23H30 BPT10-23H30-T										
BPT10-23H35 BPT10-23H35-T										
BPT15-33H45 BPT15-33H45-T	140	289	275	320	260	234	117	21.5	148	
BPT15-33H55 BPT15-33H55-T										

Low-Noise Half Metal Type Tubular Ventilating Fan 超静音半金属型管道式换气扇

External Dimension 外形尺寸图



BPT10-13H20-A, BPT10-23H25-A, BPT10-23H30-A
BPT10-23H35-A, BPT15-33H45-A, BPT15-33H55-A

Dimension Table 尺寸表


型号 Model No.	A	B	C	D	E	F	G	H	I	Units 单位:mm
BPT10-13H20-A BPT10-13H20-T	110	234	220	246	205	174	88	16		
BPT10-23H25-A BPT10-23H25-T	160	259	245	268	230	174	88	20	96	
BPT10-23H30-A BPT10-23H30-T										
BPT15-33H45-A BPT15-33H45-T	140	289	275	325	260	234	117	20	148	
BPT15-33H55-A BPT15-33H55-T										

Electrical Ratings 技术参数

型号 Model No.	额定电压/频率/相数 Rated Voltage/Frequency/Phase	功率 Power (W)	电流 Current (A)	转速 Rotating Speed (r.p.m.)	风量 Air Volume (m ³ /h)	静压 Static Pressure (Pa)	噪音 Noise (dB)	电机绝缘等级 Insulation Class	净重 Net Weight (kg)
BPT10-13H20 BPT10-13H20-A BPT10-13H20-T	220V~/50Hz~/1Ph	20	0.09	1500	120	106	33		2.4
BPT10-23H25 BPT10-23H25-A BPT10-23H25-T		16	0.07	1200	150	100	34		2.5
BPT10-23H30 BPT10-23H30-A BPT10-23H30-T		21	0.10	1300	180	115	38	E	2.5
BPT10-23H35 BPT10-23H35-A BPT10-23H35-T		26	0.12	1300	210	115	40		2.5
BPT15-33H45 BPT15-33H45-A BPT15-33H45-T		27	0.13	1030	270	118	36		3.8
BPT15-33H55 BPT15-33H55-A BPT15-33H55-T		37	0.17	1100	330	125	39		3.8

Performance Curve 性能曲线图

A: BPT10-13H20 B: BPT10-23H25 C: BPT10-23H30
BPT10-13H20-A BPT10-23H25-A BPT10-23H30-A
BPT10-13H20-T BPT10-23H25-T BPT10-23H30-T

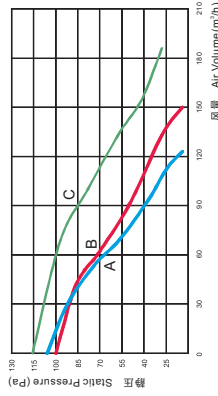

D: BPT10-23H35 E: BPT15-33H45 F: BPT15-33H55
BPT10-23H35-A BPT15-33H45-A BPT15-33H55-A
BPT10-23H35-T BPT15-33H45-T BPT15-33H55-T

